




Sakskøbingvej 6 DK-7400 Herning Tel +45 5070 9215 info@develtex.dk



Mobility Products 2016



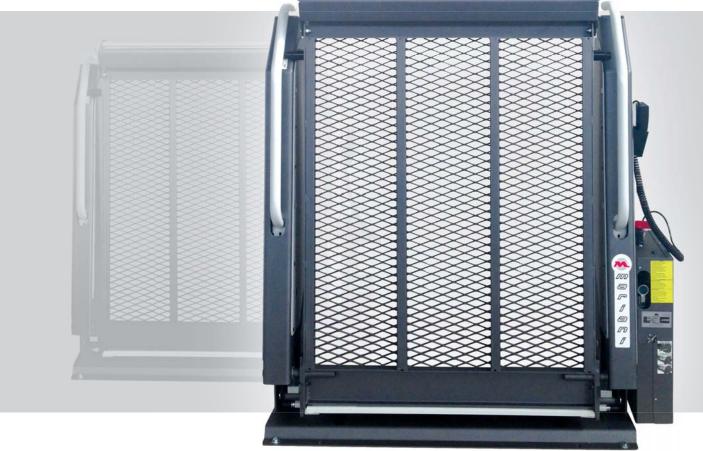

115/130/140



						E	,
LIFT BBI	А	В	С	D	Е	F	G
115.80	1280	361	1180	1030	1162	800	1150
130.80	1430	361	1180	1030	1162	800	1300
140.80	1530	361	1180	1030	1162	800	1400
140.90	1530	361	1180	1130	1262	900	1400

800 utile inter

Pump side

L

1150 1300 1400

ORDERING KEY: Example. Model Size 2141 11580

361



SAFETY DEVICES


- Switch to detach battery with key.
- Manual operation in case of emergency.
- Automatic safety ramp to stop the wheelchair
- Pressure switch to prevent stowing when loaded.
- Anti-slip platform.


The double arm lift BBI, with one piece antislip platform, is completely automatic and has been designed and made to adapt mediaum/large sized commercial vehicles to be used for person transportation.

Left or right side mounted pumpstation can be choosen.

VEHICLE EXAMPLES:


Fiat Scudo, Fiat Ducato, Ford Transit, Iveco Daily, Opel Movano, Renault Traffic, Volkswagen Crafter Kombi.







M	AXIMUM CAPACITY	320 Kg
W	EIGHT	110 Kg
PC	OWER	12 V - 24 V
M	AX PRESSURE	140 Bar
LI	FTING HEIGHT	920 mm.
SF	PEED UP (FULL LOAD)	5 M/MIN
SF	PEED DOWN (FULL LOAD)	4 M/MIN

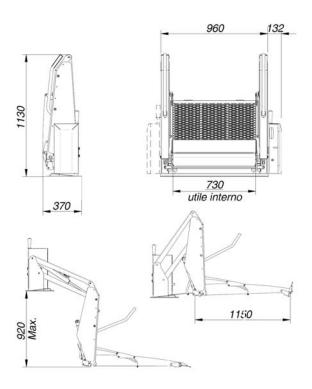

LIFT BBO	А	В	С	D	Е	F	G
115.73	*1130	370	*1130	960	1100	730	1150

 ze F 573	Pump side L	

LIFT BBO









SAFETY DEVICES


- Switch to detach battery with key.
- Manual operation in case of emergency.
- Automatic safety ramp to stop the wheelchair.
- Pressure switch to prevent stowing when loaded.
- Anti-slip platform.

The automatic lift model BBO 115.73 has reduced dimensions and weight and has been conceived for small vehicles to transport persons.


Left or right side mounted pumpstation can be choosen.

VEHICLE EXAMPLES:


Citroen Jumpy, Fiat Doblo XL, Fiat Scudo, Ford Tourneo Custom, Mercedes Vito kombi, Peugeot Expert, Renault Trafic, Volkswagen California, Volkswagen Trasporter.



MAXIMUM CAPACITY	360 Kg
WEIGHT	135 -140 Kg
POWER	12 V - 24 V
SPEED UP (FULL LOAD)	5 M/MIN
SPEED DOWN (FULL LOAD)	4 M/MIN

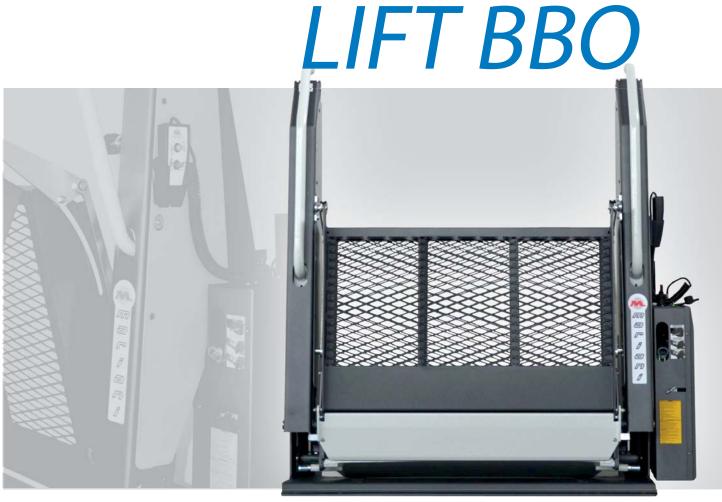

115/125/140.80-90

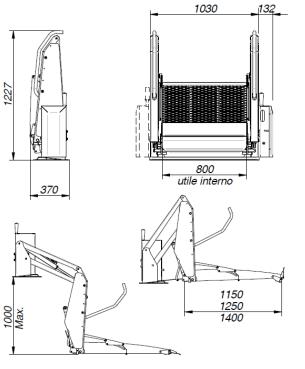

LIFT BBO	А	В	С	D	E	F	G
115.80	1227	370	1180	1030	1162	800	1150
125.80	1227	370	1180	1030	1162	800	1250
140.80	1227	370	1180	1030	1162	800	1400
140.90	1227	370	1180	1130	1262	900	1400

ORDERING KEY: Example. Model Size Pump side 2143 14080 L





SAFETY DEVICES


- Switch to detach battery with key.
- Manual operation in case of emergency.
- Automatic safety ramp to stop the wheelchair.
- Pressure switch to prevent stowing when loaded.
- Anti-slip platform.

The automatic double arm platforms have been conceived for medium-large vehicles.


Left or right side mounted pumpstation can be choosen.

VEHICLE EXAMPLES:

Citroen Jumper, Fiat Scudo, Fiat Ducato, Ford Transit, Iveco Daily, Mercedes Sprinter Kombi, Opel Vivaro, Opel Movano, Peugeot Expert Tepee, Renault Trafic, Renault Master, Volkswagen Caravelle, Volkswagen Multivan , Volkswagen Crafter Kombi



MAXIMUM CAPACITY	320 Kg
WEIGHT	110 Kg
POWER	12 V - 24 V
MAX PRESSURE	140 Bar
LIFTING HEIGHT	920 mm.
SPEED UP (FULL LOAD)	5 M/MIN
SPEED DOWN (FULL LOAD)	4 M/MIN

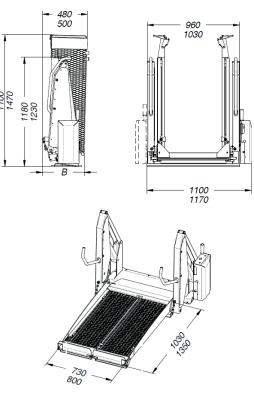

LIFT BBV	А	В	С	D	E	F	G
103.75	1100	425	1180	960	1100	730	1030
135.80	1470	460	1230	1030	1170	800	1350

ORDERING KEY: Example. Model Size Pump side 2142 10375 L

LIFT BBV



103.75





SAFETY DEVICES


- Switch to detach battery with key.
- Manual operation in case of emergency.
- Automatic safety ramp to stop the wheelchair.
- Pressure switch to prevent stowing when loaded.
- Anti-slip platform.

The double arm lift BBV 105.73 has the platform which opens vertically thus allowing a free space to go through and a good sight.


Left or right side mounted pumpstation can be choosen.

VEHICLE EXAMPLES:

Citroen Jumper, Fiat Scudo, Fiat Ducato, Ford Transit, Iveco Daily, Mercedes Sprinter Kombi, Opel Movano, Peugeot Expert Tepee, Renault Trafic, Renault Master, Volkswagen Caravelle - Multiva



MAXIMUM CAPACITY	360 Kg
WEIGHT	140 Kg
POWER	12 V - 24 V
MAX PRESSURE	140 Bar
LIFTING HEIGHT	920 mm.
SPEED UP (FULL LOAD)	5 M/MIN
SPEED DOWN (FULL LOAD)	4 M/MIN

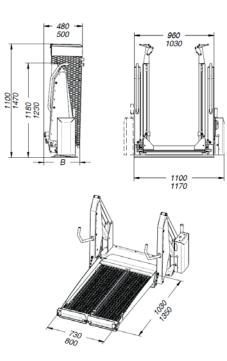

LIFT BBV	А	В	С	D	E	F	G
103.75	1100	425	1180	960	1100	730	1030
135.80	1470	460	1230	1030	1170	800	1350

ORDERING KEY: Example. Model Size Pump side 2142 13575 L

LIFT BBV





SAFETY DEVICES


- Switch to detach battery with key.
- Manual operation in case of emergency.
- Automatic safety ramp to stop the wheelchair.
- Pressure switch to prevent stowing when loaded.
- Anti-slip platform.

The double arm lift BBV 135.80 with antislip platform which opens vertically is completely automatic and has been conceived for medium-large sized vehicles that are used for person transportation.

Left or right side mounted pumpstation can be choosen.

VEHICLE EXAMPLES:

Ford Transit, Iveco Daily, Mercedes Sprinter Kombi, Opel Movano, Peugeot Expert Tepee, Renault Trafic, Renault Master, Volkswagen Caravelle, Volkswagen Crafter Kombi.






LOADING CAPACITY	250 Kg
WEIGHT	75 Kg
ELECTRICAL SYSTEM	12 V
OPENING SPEED	6 SEC
CLOSING SPEED	10 SEC

250

SINGLE ARM



260 480









SAFETY DEVICES

The Single Arm lift SA 250 is particularly recommended to adapt small vehicles thanks to its reduced dimensions.

- Lifting platform entirely in aluminium with anti-slip surface.
- Semiautomatic operation.
- Cabled remote control.
- Emergency lever for manual operation.
- Safety stopping plates.
- Anti-overturn safety device.

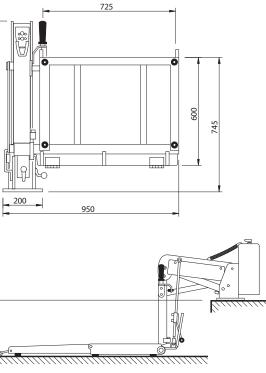

MAXIMUM CAPACITY	500 Kg
WEIGHT	130/145 Kg
POWER	12 V - 24 V
MAX PRESSURE	140 Bar
LIFTING HEIGHT	920 mm.
SPEED UP (FULL LOAD)	5 M/MIN
SPEED DOWN (FULL LOAD)	4 M/MIN

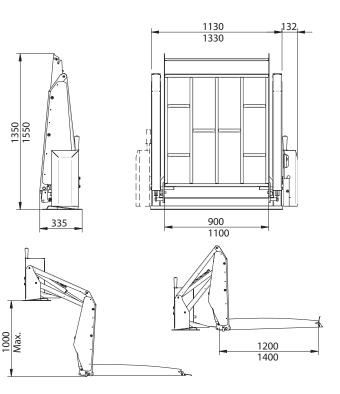

LIFT BBC	А	В	С	
120.90	1350	335	1180	12
140.110	1550	335	1180	14

ORDERING KEY:				
Example.				
Model	Size	Pump side		
2144	140110	L		






SAFETY DEVICES

- Switch to detach battery with key.
- Manual operation in case of emergency.
- Pressure switch to prevent stowing when loaded.

The BBC range platform lifts have been conceived to make the goods handling easy during the loading/unloading of commercial vehicles. This range of double arm lifts can solve many lifting problems especially on vehicles where conventional loading devices cannot be installed. The BBC lifts have a strong and stable platform in patterned aluminium. There are 2 sizes available.


Left or right side mounted pumpstation can be choosen.

VEHICLE EXAMPLES: Fiat Ducato, Iveco Daily, Opel Vivaro , Opel Movano, Renault Master, Renault Traffic.




LOADING CAPACITY	200 Kg
WEIGHT	15 Kg
ELECTRICAL SYSTEM	12 V
OPENING SPEED	3 SEC
CLOSING SPEED	3 SEC

ELECTRICAL STEP

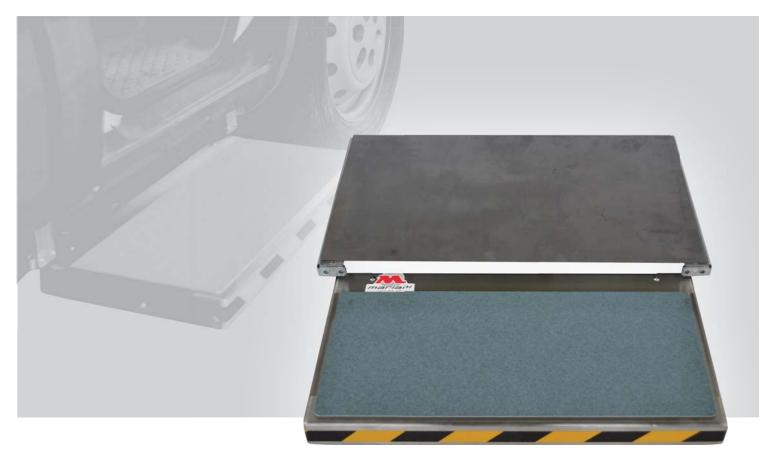



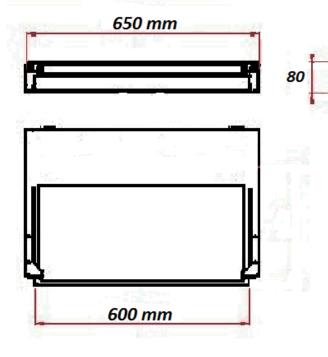






SAFETY DEVICES


The ESI 600 eletrical step helps in reducing the gap between the ground and the vehicle floor.

- Step inox.
- Zinc coated frame.
- Customized supports to adapt the steps to all types of vehicles can be available.
- Emergency lever for manual operation.
- Vehicle innerlight advising the step is out.
- Flashing light under the step when it is moving.
- Automatic stop if hitting obstacles




LOADING CAPACITY	300 Kg
WEIGHT	18 Kg
ELECTRICAL SYSTEM	12 V
OPENING SPEED	3 SEC
CLOSING SPEED	3 SEC

ELECTRICAL STEP

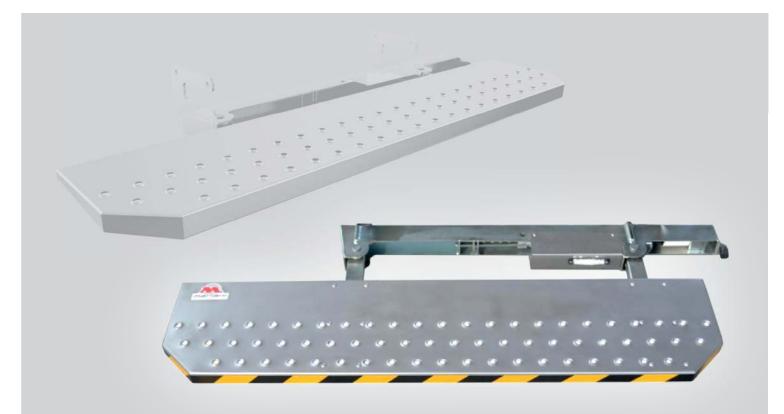

ESI 1150



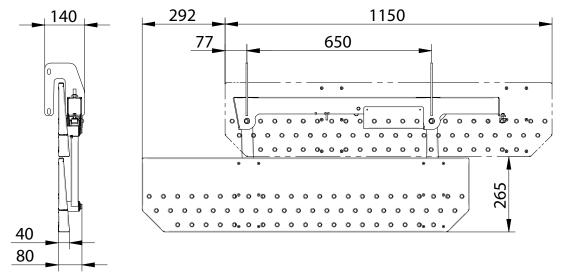




SAFETY DEVICES

The ESI 1150 eletrical step helps in reducing the gap between the ground and the vehicle floor.

- Step inox.
- Zinc coated frame.
- Customized supports to adapt the steps to all types of vehicles can be available.
- Emergency lever for manual operation.
- Vehicle innerlight advising the step is out.
- Flashing light under the step when it is moving.
- Automatic stop if hitting obstacles

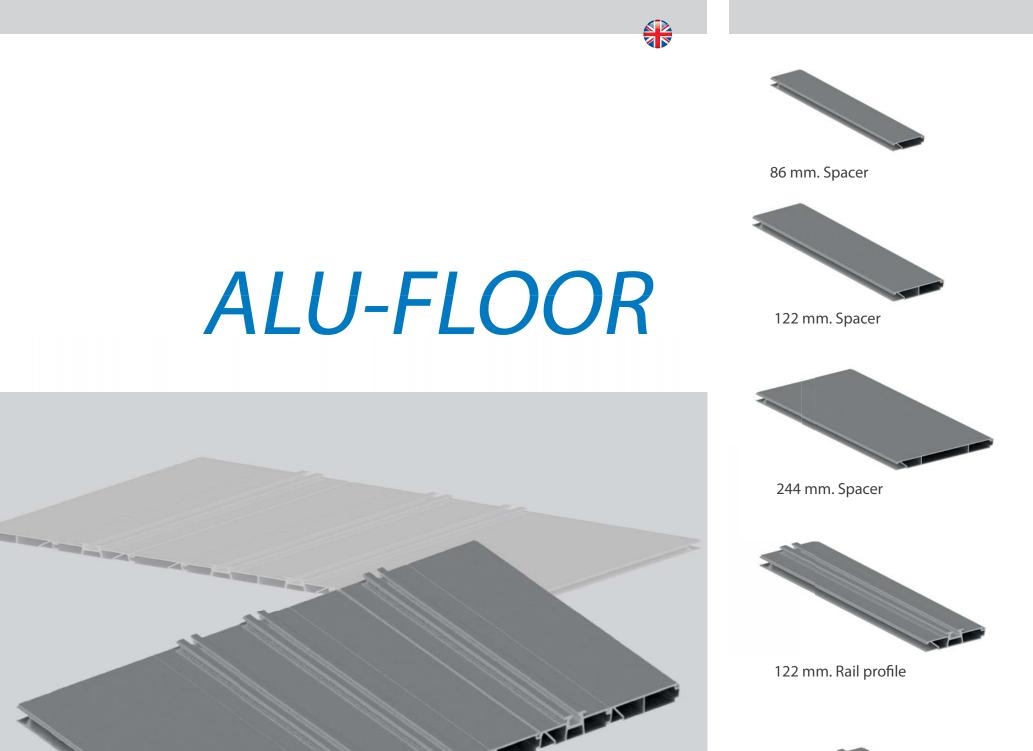





244 mm. Double rail profile

W

TA



DESCRIPTION

• Modular aluminium floor


• Simply click in single and double rail profiles to realize almost any vehicle floor layout

• Round drilled cut or C-profile single rail profile

• Round drilled cut or C-profile double rail profile

• Various spacer profiles

Various lengths



Single and Double rail profiles available with standard ø20 - 25,4 holes


SICOM 2



OPTIONS

Single seat

- Double seat
- 3 person seat bench
- Various accessories
- 4 point seat belt
- Upholstery in softline, leahter etc.
- Various seat fabrics / upholstery options











Microfieber schwarz Kunstleder H11 schwarz



Austin Kunstleder H11 schwarz oder



DESCRIPTION

- Rigid or adjustable backrest
- Integrated 3 point seat belt
- Integrated head rest

TÜV tested M1 ECE-R14.07

The comfortable seating system for minibuses and transporter



UPOLSTERY VARIANTS





Ford Lane blaue Streifen mit Kunstleder H11 schwarz






MB Tunja mit Kunstleder H11 schwarz





Austin Kunstleder H07 grau

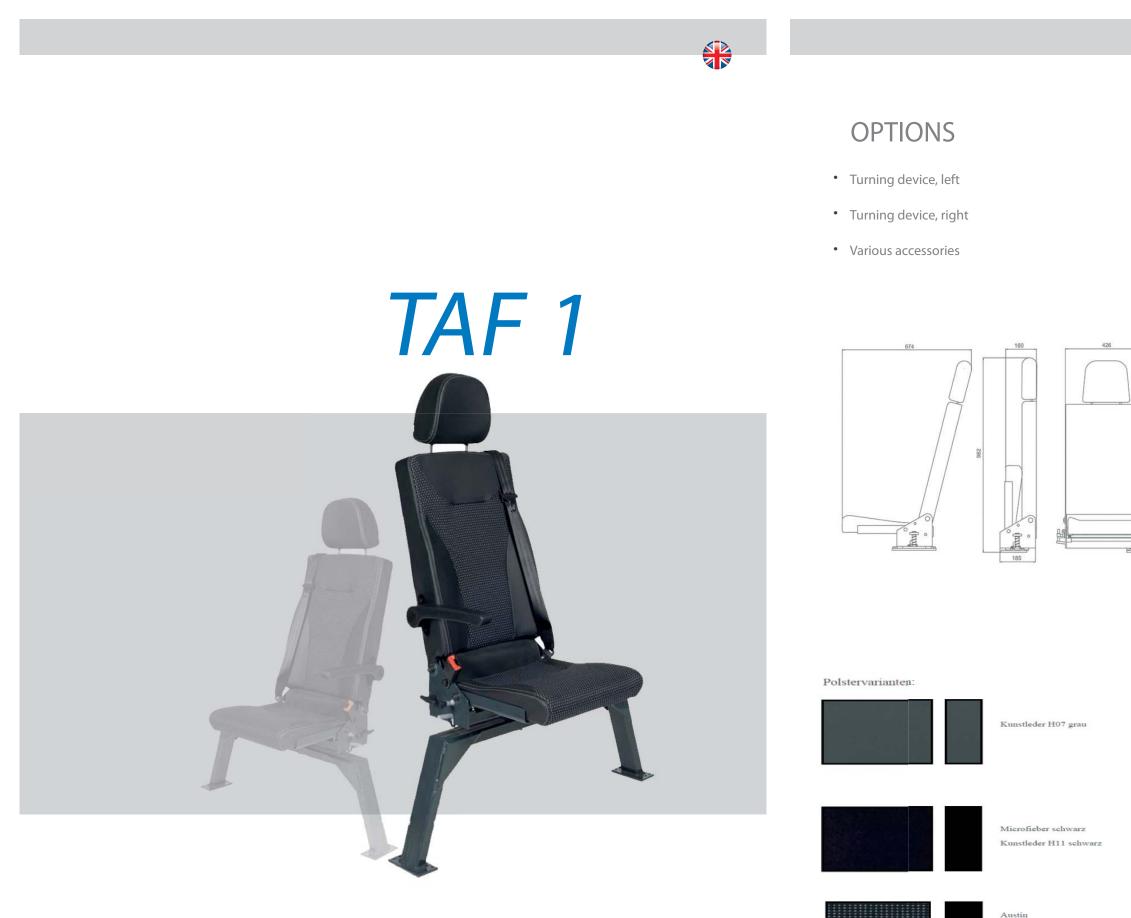

Kunstleder H11 schwarz oder



DESCRIPTION

- High rigid
- Backrest adjustable in two positions
- Integrated 3 point seat belt
- Height and angle-adjustable head rest Asymmetrical turning device

TÜV tested M1 ECE-R14.07

The many-sided seating system for minibuses, transporters, handicapped transporters, ambulance vehicles and Patient Transport Ambulances (PTA)



UPOLSTERY VARIANTS



Ford Lane blaue Streifen mit Kunstleder H11 schwarz



MB Tunja mit Kunstleder H11 schwarz





Austin Kunstleder H07 grau




OPTIONS

- Grip
- Arm rest
- 4-point seat belt
- Nonstandard fabrics on additional price

THE INEXPENSIVE ALTERNATIVE


SHORT LEAD TIME





LINEA

Polstervarianten:



Kunstleder H07 grau



Microfieber schwarz Kunstleder H11 schwarz



Austin Kunstleder H11 schwarz oder







DESCRIPTION

- Rigid or adjustable backrest
- Low priced
- Easy-care
- Robust
- 3-point-seatbelt completely protected

TÜV tested M1 ECE-R14.07



UPOLSTERY VARIANTS





Easyleg - fast lock system

LEG SYSTEMS








Easyleg - fast lock system with swivel



Central leg - fixed mounting



Central leg - fixed mounting with swivel





DESCRIPTION

- Various heights: 300 mm, 260 mm, 190 mm
- Other heights available on request
- Passenger seating in minibuses and vans
- Emergency vehicles
- Disabled transport vehicles
- Military vehicles

TÜV tested M1 ECE-R14.07



Wheel arch traversal for TAF seats



Central leg - fast lock system

RESTRAINTS

- Belt locks from automotive sector large-scale series production (Honda)
- Series production with automatical sewing machines
- Height-adujustable seat belts
- Fixed lap belt connections

TÜV test certificate in accordance with ISO 10542 and DIN 75078-2 ECE-R14.07



















Quick-release

All parts, sets and fittings can be combined according to your specific need.











Standard DIN

ARCIED

Comfort ISO

A State D

Comfort ISO Z

Floor fixture

Quick-Connect



DESCRIPTION

- 4 retractors at the price of a standard
- 4-fold-fitting with double locking devices
- 4 retractor toothed wheels with 24 teeth
- Metal housing for retractors

Standard DIN with tension

Develtex ApS



Sakskøbingvej 6 DK-7400 Herning Tel +45 5070 9215 info@develtex.dk

